# Blue Vision 2021 i, b Orange Vision 2021 i, b

(i - injection | b - boiler)



- Retigo control philosophy Maximal comfort for Chefs
- Turbo steam function Fresh steam boost for the best steaming Massive door handle Comfortable and safe manipulation
- Curved double glass door No more burns and energy losses Unique cooking chamber finishing Longer lifetime more hygiene AISI 304 only as a matter of fact No corrosion risks
- Cross-wise racks No burn wrists, better visual control
- Bi-directional fan Excellent cooking and baking evenness
- Perfect halogen illumination Precise visual control

- Run-off tray under the door No slipping on water
  Removable door seal Easy maintenance
  WSS water saving system Minimized water consumption
  Integrated shower Easy cleaning, no fighting with winding up
- service and diagnostic system Lower service costs, time
- IPX5 shield Maximal safety in kitchen environment
- CCS calcium control system Keeps eye on calc\*
- Instant HACCP records Food quality ensured Extra tray Enhanced capacity
- Loading trolley
  - \* valid for boiler models only





### B 2021 i, b

- EASY COOKING Instant&Simple cooking with new technology VISION AGENT Virtual help at your finger tip ACTIVE CLEANING Less money&time higher hygiene level
- ACTIVE DESCALER Automatic cooking chamber descaling
- Big Color touch screen controls simplicity in practice Hot air 30–300  $^{\circ}\text{C}$
- Combination 30–300 °C
- Steaming 30–130 °C
- 4 point temperature core probe Food core under control
- Delta T cooking, steaming Excellence with big food chunks
  Low temperature roasting Lower weight lost, better taste
  Overnight cooking / baking Saves time and money
  Cook & Hold Time savings in kitchen

- Regeneration/Banqueting Serve more in shorter times Programming Easy to operate (1000 programs/20 steps)
- Pictograms, Touch&Cook Just double touch for cooking
- Vision Chef Instant food preparation and cooking advisor 5 speed ventilator with auto reverse system No limits in your cooking
- Ventilator fan timing 3 steps for greater evenness
- Rack timing Different products cooked at once Learn function Improves cooking standards every time Fan Stop Prevents scalding when door opened quickly
- Automatic preheating/cooling Compensates loading Temp. drops Autoclima steam saturation control (1 % precision) for the best results
- Automatic start Helps to reduce idles and save your time
- QuickView fast program overview Easy orientation in steps Golden Touch Controlled finishing for crispy and brown excellence ACM (Automatic Capacity Management) Adjusts
- to the best cooking
  Energy logic Energy costs under your control, consumption displayed
  USB Plug-in, LAN interface Saves your time with managing data

#### **UNIT OPTIONS**

- Safety door opening in two steps
- Software to manage HACCP data and recipes free of charge
- Optional voltage 3N~/230V/50Hz

### O 2021 i, b

- Digital control display with touch controls Simplicity
- Autoclima steam saturation control (1 % precision) for the best results
- Hot air 30–300 °C Combination 50–300 °C
- Steaming 99–130 °C
- Regeneration/Banqueting Serves more in shorter times
- Programming 99 programs with 9 steps 1 point temperature core probe Food core under control
- 1 speed ventilator with Auto reverse system Evennes controlled
- Automatic preheating/cooling Compensates loading Temp, drops
- ACM (Automatic Capacity Management) Adjusts to the best cooking
  Automatic start – Helps to reduce idles and save your time
- USB Plug-in, LAN interface Saves your time with managing data

#### **UNIT OPTIONS**

- Flap valve
- 5 ventilator speeds + Fan stop function
- Safety door opening in two steps
- Software to manage HACCP data and recipes free of charge
- Optional voltage 3N~/230V/50Hz

#### **ACCESSORIES**

VO 2021 R VO 2021 B


LOADING RAMP 2021


spare loading trolleybanquet trolley for 96 or 118 plates


TO 2021 VO 1521 R


– thermocover for trolley VO 2021 R, B – loading trolley with 15 trays with 85 mm spacing

FEET FITTING MEANS HANDLE MOUNT FOR LOADING TROLLEY OIL SPRAY GUN

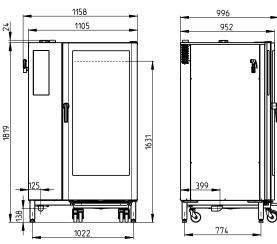





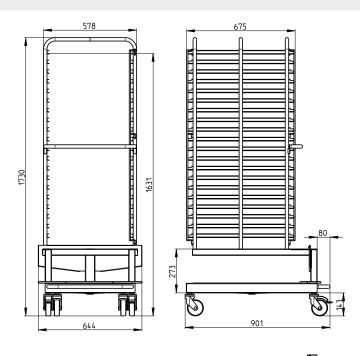

589

A - Flap valve, B - Chimney, C - Drain, E - Electricity, V1 - Untreated water, V2 - Treated water

### B 2021 i / O 2021 i

## B 2021 b / O 2021 b

ration	boiler
	DOILE
y 21 t	rays GN2/1
meals	500-900
nm]	60
1 x D) [mm] 1105 x	(1841 x 952
	344 kg
rer	59,4 kW
on power	48 kW
tion	100 A
3 N~/4	400 V/50 Hz
/ drain [mm]	G 3/4"-/ 50
ure	30-300 °C
ric	meds

SIZE	MODEL	TECHNICAL SPECIFICATION
2021	B2021i, O2021i, B2021b, O2021b	E2021IA, E2021IZ, E2021BA, E2021BZ

